




WJ Middle East
Expert in Water Management

Technical Data

Model of pump	CD250M
Type of pump	Diesel Pump
Width	1,300mm
Length	2,950mm
Height	1,900mm
Dry weight	2,785kg
Inlet diameter	10 inch (250mm)
Outlet diameter	10 inch (250mm)
Solids handling	75 mm diameter
Engine	106D-E66TA 103.5kW
Fuel consumption	26 lph @ 2000 rpm
Maximum flow	800m ³ /hr (220 l/s)
Recommended maximum flow	600m ³ /hr (166 l/s)
Maximum discharge head	40 m (30m recommended)
Maximum suction head	9 m (5 m recommended)
Maximum working pressure	5.5 Bar
Maximum suction pressure	4.5 Bar
Medium	Liquid, sewage



Flow (m³/hour)

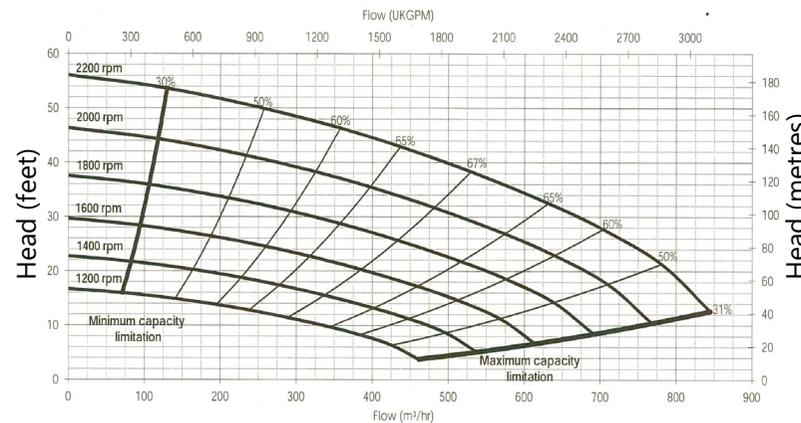

Flow (US gallon/min)

CD250M Diesel Pump Specification

The CD250M is a reliable diesel surface pump ideal for all your booster, over pumping and sewage bypass jobs.

It offers pumping capacity up to 220l/s, discharge head up to 40m, and solids handling to 75mm in diameter.

The CD250M is ideal for use on sewage and overpumping works where intermittent flows are common as the double high pressure mechanical seal means that the pump can run dry without damage.

Call us today for more information.

*Available for hire with operator.

www.wj-me.com
info@wj-me.com